

Datalux Full HD  
Touch monitor



### 250-T series

24 (23.8" / 60.5 cm diag.)  
1920 x 1080 (Full HD)

**DL24N250S-T**



## Work in style

Experience productivity with Full HD Touch interactive monitor . This monitor is equipped with essentials for the workplace, such as LowBlue mode to protect the eyes, IPS LED wide view technology for high-quality imagery, and 1ms MPRT for sharp visuals.

#### Superb Picture Quality

- 100Hz refresh rates for ultra-smooth images
- IPS LED wide view technology for image and color accuracy
- 1ms (MPRT) fast response for crisp image and smooth gameplay
- 16:9 Full HD display for crisp detailed images

#### Features designed for you

- 10 points multitouch screen
- LowBlue mode and Flicker-free easy-on-the eyes viewing
- EasyRead mode for a paper-like reading experience
- Cable management reduces cable clutter for neat workspace
- EasySelect menu toggle key for quick on-screen menu access

#### Easy to experience

- Built-in stereo speakers for multimedia
- HDMI ensures universal digital connectivity
- VESA mount for convenience

**DataLux®**

Full HD Touch monitor  
250 series 24 (23.8" / 60.5 cm diag.), 1920 x 1080 (Full HD)

# Highlights

## 100Hz Fast refresh



High refresh rate

Low refresh rate

This Datalux display refreshes the screen image up to 100 times per second which makes this monitor much faster than a standard display. With a 100Hz frame rate, gamers are able to find those critical images on the screen that show enemy movement in an ultra-smooth motion so that they are easily targetable.


## IPS technology

Experience consistent colours from  
178 Degree viewing angles



IPS displays use an advanced technology which gives you extra wide viewing angles of 178/178 degree, making it possible to view the display from almost any angle. Unlike standard TN panels, IPS displays gives you remarkably crisp images with vivid colors, making it ideal not only for Photos, movies and web browsing, but also for professional applications which demand color accuracy and consistent brightness at all times.

## 16:9 Full HD display

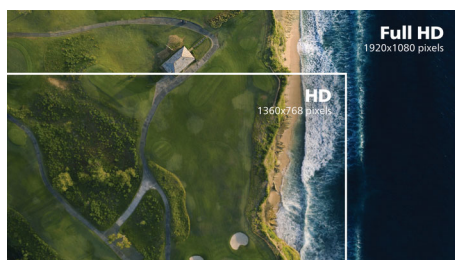

Picture quality matters. Regular displays deliver quality, but you expect more. This display


features enhanced Full HD 1920 x 1080 resolution. With Full HD for crisp detail paired with high brightness, incredible contrast and realistic colors expect a true to life picture.

## LowBlue Mode & Flicker-free




Our LowBlue Mode and Flicker-free technology have been developed to reduce eye strain and fatigue often caused by long hours in front of a monitor.

## EasyRead mode

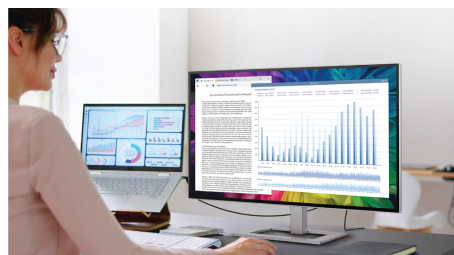

EasyRead mode for a paper-like reading experience

## Built-in stereo speakers

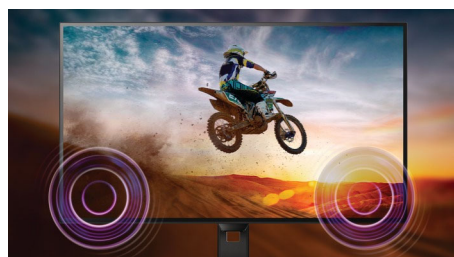

A pair of high quality stereo speakers built into a display device. It can be visible front firing, or invisible down firing, top firing, rear firing, etc depending on model and design.

DL24N250S-T

## 1ms MPRT fast response



MPRT (motion picture response time) is more intuitive way to describe the response time, which directly refers the duration from seeing blurry noise to clean and crisp images. Datalux gaming monitor with 1 ms MPRT effectively eliminates smearing and motion blur, delivers shaper and precise visuals to enhance gaming experience. Best choice for playing thrilling and twitch-sensitive games.

## Cable management



Cable management is an intimate design that maintains tidy workspace by organizing cables and wires required for the operation of a display device.

## EasySelect Menu Toggle Key



The discreetly placed EasySelect Menu Toggle Key allows you to make quick and easy adjustments to monitor settings in the On-Screen Display menu.



# Specifications

## Picture/Display

- LCD panel type: IPS technology
- Touch screen type: IR Touch
- Touch points: 10
- Backlight type: W-LED system
- Panel Size: 23.8 inch / 60.5 cm
- Display Screen Coating: Anti-Glare, 3H, Haze 25%
- Effective viewing area: 527.04 (H) x 296.46 (V)
- Aspect ratio: 16:9
- Maximum resolution: 1920 x 1080 @ 100 Hz\*
- Pixel Density: 92.56 PPI
- Response time (typical): 4 ms (Gray to Gray)\*
- MPRT: 1 ms
- Brightness: 250 cd/m<sup>2</sup>
- Contrast ratio (typical): 1300:1
- SmartContrast: Mega Infinity DCR
- Pixel pitch: 0.2745 x 0.2745 mm
- Viewing angle: 178° (H) / 178° (V), @ C/R > 10
- Flicker-free
- Picture enhancement: SmartImage game
- Display colors: 16.7 M
- Scanning Frequency: VGA: 30 KHz - 85 KHz (H) / 48 Hz - 60 Hz (V); HDMI: 30 KHz - 115 KHz (H) / 48 Hz - 100 Hz (V)
- LowBlue Mode
- EasyRead
- sRGB
- Adaptive sync

## Connectivity

- Signal Input: VGA x 1, HDMI 1.4 x 1
- Sync Input: Separate Sync
- Audio (In/Out): Audio out, Audio-in
- HDCP: HDCP 1.4 (HDMI)

## Convenience

- Built-in Speakers: 2 W x 2
- User convenience: Power On/Off, Menu, Volume, Input, SmartImage Game
- OSD Languages: Brazil Portuguese, Czech, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, Turkish, Ukrainian
- Other convenience: Kensington lock, VESA mount (100x100mm)
- Plug & Play Compatibility: DDC/CI, Mac OS X, sRGB, Windows 11 / 10

## Stand

- Tilt: -5/20 degree

## Power

- On mode: 14.5 W (typ.)
- Standby mode: 0.5 W (typ.)
- Off mode: 0.3 W (typ.)
- Energy Label Class: D
- Power LED indicator: Operation - White, Standby mode- White (blinking)
- Power supply: External, 100-240VAC, 50-60Hz

## Dimensions

- Product with stand(max height): 542 x 417 x 180 mm
- Product without stand (mm): 542 x 316 x 45 mm
- Packaging in mm (WxHxD): 610 x 370 x 124 mm

## Weight

- Product with stand (kg): 2.92 kg
- Product without stand (kg): 2.57 kg
- Product with packaging (kg): 4.68 kg

## Operating conditions

- Temperature range (operation): 0 to 40 °C
- Temperature range (storage): -20 to 60 °C
- Relative humidity: 20%-80 %
- Altitude: Operation: +12,000ft (3,658m), Non-operation: +40,000ft (12,192m)
- MTBF: 50,000 hrs (excluding backlight) hour(s)

## Sustainability

- Environmental and energy: RoHS
- Recyclable packaging material: 100 %
- Specific Substances: Mercury free, PVC / BFR free housing

## Compliance and standards

- Regulatory Approvals: BSMI, CB, CE, EAC, FCC, UL, ICES-003, MEPS, PSB, RoHS, TUV/ISO9241-307, BIS, TUV-BAUART, VCCI

## Cabinet

- Color: Black
- Finish: Textured

## What's in the box?

- Monitor with stand
- Cables: HDMI cable, Power cable
- User Documentation

\* The maximum resolution works for HDMI input only.  
\* For best output performance, please always ensure that your graphic card is capable of achieving the maximum resolution and refresh rate of this Datalux display.  
\* Response time value equal to SmartResponse  
\* MPRT is to adjust brightness for blur reduction, so cannot adjust brightness while MPRT is turned on. To reduce motion blur, LED backlight will strobe synchronously with screen refresh, which may cause noticeable brightness change.  
\* MPRT is gaming-optimized mode. Turn on MPRT may cause noticeable screen flickering. It is recommended to turn off when you are not using the gaming function.  
\* The products and accessories listed on this leaflet may differ by country and region.  
\* The monitor may look different from feature images.